



HIMOINSA®
THE ENERGY



MODEL
HRYW-25 T6

HR RANGE
Soundproofed rental
Powered by YANMAR

- B10R** B10R
- WATER-COOLED
- T** THREE PHASE
- 60 Hz** 60 HZ
- NON COMPLYING EPA
- DIESEL

Generating Rates



SERVICE		PRP	STANDBY
Power	kVA	26	28
Power	kW	21	23
Rated Speed	r.p.m.	1.800	
Standard Voltage	V	220/127	
Available Voltages	V	208/120 - 380/220 - 440/254 - 480/277	
Rated at power factor	Cos Phi	0,8	

01

HIMOINSA Company with quality certification ISO 9001

HIMOINSA gensets are compliant with EC mark which includes the following directives:

- 2006/42/CE Machinery safety.
- 2006/95/EC Low voltage.
- 2004/108/CE Electromagnetic compatibility.
- 2000/14/EC Sound Power level. Noise emissions outdoor equipment. (amended by 2005/88/EC)
- EN 12100, EN 13857, EN 60204

Ambient conditions of reference according to ISO 8528-1:2005 normative: 1000 mbar, 25°C, 30% relative humidity.

Prime Power (PRP):

According to ISO 8528-1:2005, Prime power is the maximum power which a generating set is capable of delivering continuously whilst supplying a variable electrical load when operated for an unlimited number of hours per year under the agreed operating conditions with the maintenance intervals and procedures being carried out as prescribed by the manufacturer. The permissible average power output (Ppp) over 24 h of operation shall not exceed 70 % of the PRP.

Emergency Standby Power (ESP):

According to ISO 8528-1:2005, Emergency standby power is the maximum power available during a variable electrical power sequence, under the stated operating conditions, for which a generating set is capable of delivering in the event of a utility power outage or under test conditions for up to 200 h of operation per year with the maintenance intervals and procedures being carried out as prescribed by the manufacturers. The permissible average power output over 24 h of operation shall not exceed 70 % of the ESP

HIMOINSA HEADQUARTERS:

Fábrica: Ctra. Murcia - San Javier, Km. 23,6 | 30730 SAN JAVIER (Murcia) Spain
Tel.+34 968 19 11 28 Fax +34 968 19 12 17 Fax +34 968 19 04 20 info@himoinsa.com www.himoinsa.com

Manufacture facilities:

SPAIN • FRANCE • INDIA • CHINA • USA • BRASIL

Subsidiaries:

ITALY | PORTUGAL | POLAND | GERMANY | SINGAPORE | UAE | MEXICO | PANAMÁ | ARGENTINA | UK



Ctra. Murcia - San Javier, km. 23,6 | 30730 San Javier (Murcia) SPAIN | Tel.: +34 902 19 11 28 / +34 968 19 11 28
Fax: +34 968 19 12 17 | Export Fax +34 968 19 04 20 | E-mail:info@himoinsa.com | www.himoinsa.com





Engine Specifications 1.800 r.p.m.

ENGINE		PRP	STANDBY
Rated Output	kW	24,2	26,8
Manufacturer		YANMAR	
Model		4TNV84T BGGEH	
Engine Type		Diesel 4 strokes-cycle	
Injection Type		Direct	
Aspiration Type		Turbocharged	
Cylinders Arrangement		4 - L	
Bore and Stroke	mm	84 x 90	
Displacement	L	1,995	
Cooling System		coolant	
Lube Oil Specifications		SAE 3 class 10W30 / API grade CD,CF	
Compression Ratio		18,9	
Fuel Consumption StandBy	l/h	7,23	
Fuel Consumption 100% PRP	l/h	6,47	
Fuel Consumption 75 % PRP	l/h	4,90	
Fuel Consumption 50 % PRP	l/h	3,48	
Lube Oil Consumption Full Load	g/kwh	0,27	
Total Oil Capacity	L	7,4	
Total Coolant Capacity	L	5,8	
Governor	Type	Mechanical	
Air Filter	Type	Dry	
Inner diameter exhaust pipe	mm	34,7	

Generator

Generator		
Poles	Num	4
Winding Conections (standard)		Star - Parallel
Frame Mounting		S-4 7,5"
Insulation	Class	H class
Enclosure (according IEC-34-5)		IP23
Exciter System		self-excited, brushless
Voltage Regulator		A.V.R. (Electronic)
Bearing		Single bearing
Coupling		Flexible disc
Coating type		Standard (Vacuum impregnation)



Application Data

Exhaust System

Maximum exhaust temperature	°C	540
Exhaust Gas Flow	m3/min	7,52
Maximum allowed back pressure	mm H2o	1000
Exhaust Flange Size (external diameter)	mm	65

Air Inlet System

Intake Air Flow	m3/h	140,05
Cooling Air Flow	m3/s	0,987
Alternator fan air flow	m3/s	0,108

Starting System

Starting Motor	kW	1,4
Starting Motor	CV	1,9
Recommended Battery Capacity	Ah	92
Auxiliary Voltage	Vcc	12

Fuel System


Fuel Oil Specifications		Diesel
Fuel Tank	L	100
Other Fuel tank capacity	L	100, 190, 330



HIMOINSA®
THE ENERGY

MODEL
HRYW-25 T6
HR RANGE
Soundproofed rental
Powered by YANMAR

Dimensions

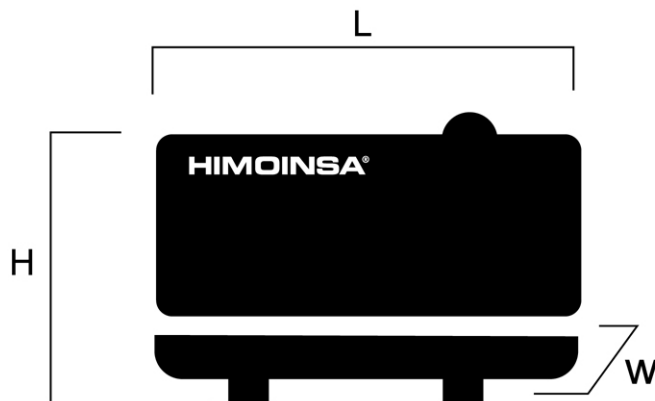

B10R Weight and Dimensions			
(L) Length	mm	2.150	
(H) Height	mm	1.329	
(W) Width	mm	1.025	
Maximum shipping volume (standard supplier)		m3	2,93
(*) Wet weight	Kg	808	
Fuel tank capacity		L	100
Autonomy		Hours	20
Sound pressure level		dB(A)@7m	61 ± 2,3
(*) (with standard accessories)		STANDARD VERSION (Plastic tank)	

Himoinsa has the right to modify any characteristic without prior notice.
Weights and dimensions based on standard products. Illustrations may include optional equipment.
Technical data described here correspond with the available information at the moment of printing.
Industrial design under patent.

Local Distributor



Dimensions of other available versions

Weight and Dimensions		
(L) Length	mm	2.150
(H) Height	mm	1.329
(W) Width	mm	1.025
Maximum shipping volume (standard supplier)	m3	2,93
(*) Wet weight	Kg	848
Fuel tank capacity	L	100
Autonomy	Hours	20
Sound pressure level	dB(A)@7m	61 ± 2,3
(*) (with standard accessories)		
OPTIONAL VERSION (Steel tank)		

Weight and Dimensions		
(L) Length	mm	2.150
(H) Height	mm	1.557
(W) Width	mm	1.025
Maximum shipping volume (standard supplier)	m3	3,43
(*) Wet weight	Kg	898
Fuel tank capacity	L	190
Autonomy	Hours	39
Sound pressure level	dB(A)@7m	61 ± 2,3
(*) (with standard accessories)		
HIGH CAPACITY VERSION (Steel tank)		

Weight and Dimensions		
(L) Length	mm	2.150
(H) Height	mm	1.557
(W) Width	mm	1.025
Maximum shipping volume (standard supplier)	m3	3,43
(*) Wet weight	Kg	953
Fuel tank capacity	L	330
Autonomy	Hours	67
Sound pressure level	dB(A)@7m	61 ± 2,3
(*) (with standard accessories)		
HIGH CAPACITY VERSION (Steel tank)		



HIMOINSA®
THE ENERGY

CONTROL PANEL MODEL

M6

Control panel of free voltage contact and tetra polar thermal magnetic protection or bipolar (depending on voltage) and differential relay. Digital control unit M6



M5

Digital manual auto-start control panel and thermal magnetic protection (according to voltage and phase) and differential relay. Digital control unit CEM7



MODEL
HRYW-25 T6

HR RANGE
Soundproofed rental
Powered by YANMAR



Controller features (I)

- : Standar
- x : Not included
- : Optional
- A : Warning. Warning alarm without engine stop.
- P : Alarm with Engine Stop

Generator Readings	M6	CEM 7
Voltage among phases	x	•
Voltage between neutral and phase	x	•
Amperage	x	•
Frequency	x	•
Aparent power (Kva)	x	•
Active power (Kw)	x	•
Reactive power (kVAr)	x	•
Power factor	x	•
Mains Readings	M6	CEM 7
Voltage among phases	x	x
Voltage among phases and neutral	x	x
Amperage	x	x
Frequency	x	x
Aparent power	x	x
Active power	x	x
Reactive power	x	x
Power factor	x	x
Engine Readings	M6	CEM 7
Coolant temperature	x	•
Oil pressure	x	•
Fuel level	x	•
Battery voltage	x	•
R.P.M	x	•
Battery charge alternator voltage	x	•
Engine Protections	M6	CEM 7
High water temperature	P	•
High water temperature by sensor	x	•
Low water temperature by sensor	x	•
Low oil pressure	P	•
Low oil pressure by sensor	x	•
Low water level	x	•
Unexpected shutdown	•	•



Controller features (II)

- : Standar
- x : Not included
- : Optional
- A : Warning. Warning alarm without engine stop.
- P : Alarm with Engine Stop

Engine Protections	M6	CEM 7
Fuel storage	A	•
Fuel storage by sensor	x	•
Stop failure	x	•
Battery voltage failure	x	•
Battery charge alternator failure	A	•
Overspeed	P	•
Underspeed	x	•
Start failure	•	•
Emergency stop	•	•
Alternator Protections	M6	CEM 7
High frequency	P	•
Low frequency	x	•
High voltage	x	•
Low voltage	x	•
Short-circuit	x	•
Asymetry among phases	x	•
Incorrect phase sequence	x	•
Inverse power	x	•
Overload	x	•
Genset signal droop	x	•
Counters	M6	CEM 7
Total hour counter	x	•
Partial hour counter	x	•
Kilowattimeter	x	•
Starts valid counters	x	•
Starts failure counters	x	•
Maintenance	x	•
Communications	M6	CEM 7
RS232	x	•
RS485	x	•
Modbus IP	x	•
Modbus	x	•



MODEL HRYW-25 T6

HR RANGE
Soundproofed rental
Powered by YANMAR

Controller features (III)

- : Standar
- x : Not included
- : Optional
- A : Warning. Warning alarm without engine stop.
- P : Alarm with Engine Stop

Communications	M6	CEM 7
CCLAN	x	•
Software for PC	x	•
Analogic modem	x	•
GSM/GPRS modem	x	•
Remote screen	x	•
Telesignal	x	• (8 + 4)
J1939	x	•
Features	M6	CEM 7
Alarm history	x	• (10) / (opc. +100)
External start	•	•
Start inhibition	x	•
Mains failure start	x	x
Start under normative EJP	x	•
Pre-heating engine control	•	•
Genset contactor activation	•	•
Mains & Genset contactor activation	x	x
Fuel transfer control	x	•
Engine temperature control	x	•
Manual override	x	•
Programmable alarms	x	•
Genset start function in test mode	x	•
Programmable outputs	x	•
Multilingual	x	•
Special Functions	M6	CEM 7
Positioning GPS	x	•
Synchronization	x	•
Mains synchronization	x	•
Second Zero elimination	x	•
RAM7	x	•
Remote screen	x	•
Programming timer	x	•



HIMOINSA®
THE ENERGY

MODEL
HRYW-25 T6
HR RANGE
Soundproofed rental
Powered by YANMAR

Generating Sets Standard and Optional Features

Engine

- Diesel engine
- 4 strokes-cycle
- Water-cooled
- 12V Electrical system
- Radiator with blowing fan
- Water separator decanting filter (visible level)
- Mechanical governor
- Dry air cleaner
- Hot parts protection
- Moving parts protection

Alternator

- Self-excited and Self-regulated
- IP23 protection degree
- Insulation H class

Electrical system

- M5 control panel with digital CEM7 controller and switched emergency stop
- Power panel with bus bars from breaker
- Safety relay in output terminal (thermomagnetical trip and alarm in controller)
- Earth leakage protection adjustable (time & sensibility) standard in M5 and AS5 configuration with MCCB
- MCCB 4P
- Battery charger alternator with ground connection
- Starting battery/ies installed and connected to the engine (supports included)
- Ground connection electrical installation with connection ready for ground pike (not supplied)
- Optional : · Battery isolator

Soundproofed version

- Steel made chassis
- Oil sump extraction kit
- Versatility to assemble high capacity metallic fuel tank chassis
- External filling of the fuel tank with safety key
- EMERGENCY STOP BUTTON (double protection for emergency stop Interior in panel + Exterior in canopy)
- Mechanized for power cable output
- Door with window to visualize control panel, alarms and measurements
- Handhole to fill the radiator
- Pre-installation or niche to house the quick connection hydraulic fittings for fuel transfer
- Pressure locks
- Anti-leakage chassis, predisposed to retain liquids (retention tray)
- Handhole for fuel tank cleaning and drainage
- Handhole for chassis cleaning
- Oversized chassis for canopy protection
- Pulling skid and pockets for transportation with forklift
- Tilting cap in the exhaust
- Antivibration shock absorber
- Chassis with integrated fuel tank
- Fuel level sender
- Sound attenuated canopy made of high quality steel metal.
- High mechanical strenght



HIMOINSA®
THE ENERGY

MODEL
HRYW-25 T6
HR RANGE
Soundproofed rental
Powered by YANMAR

Generating Sets Standard and Optional Features

Soundproofed version

- Low noise level
 - Attenuation through high density rock wool material
 - Epoxy Powder coating
 - Easy acces for service mainteance
 - Reinforced lifting eye to lift by crane
 - Steel made residential silencer -35db(A) attenuation.
- Optional :
- 3 way valve fuel filling (available in 1/2" and 3/8" fittings)
 - Fuel transfer pump



HIMOINSA®
THE ENERGY

MODEL
HRYW-25 T6
HR RANGE
Soundproofed rental
Powered by YANMAR

PDF Summary

Created : 29/03/2016 12:25

Author : Himoinsa

Number of pages : 12

Report Type: Data Sheet - Hr range

Generated by: HIMOINSA Engineering Dept.

Page 1. Genset data

Page 2. Engine Specifications. Generator Specifications.

Page 3. Installation Data

Page 4. Dimensions

Page 5. Dimensions of other available versions

Page 6. Control Panel Model

Page 7. Controller features (I)

Page 8. Controller features (II)

Page 9. Controller features (III)

Page 10. Generator Features & Options

Page 11. Generator Features & Options

Page 12. PDF Summary (ID454E34323131353134)

http://www.himoinsa.com/generating-sets/421_22/diesel-generator-hryw-25_t6-yanmar-60hz-hr-range-prp_25,8kva.aspx



12



Ctra. Murcia - San Javier, km. 23,6 | 30730 San Javier (Murcia) SPAIN | Tel.: +34 902 19 11 28 / +34 968 19 11 28
Fax: +34 968 19 12 17 | Export Fax +34 968 19 04 20 | E-mail: info@himoinsa.com | www.himoinsa.com

